

MC3470, MC3470A FLOPPY DISK READ-AMPLIFIER SYSTEMS

D2759, NOVEMBER 1983—REVISED FEBRUARY 1988


- Combines All Read-Amplifier Active Circuitry into One Monolithic Circuit
- Peak Shift . . . 2% Max (MC3470A)
- Designed to be Interchangeable with Motorola MC3470

description

The MC3470 and MC3470A are monolithic read-amplifier systems each containing all the active circuitry necessary for obtaining digital information from floppy disk storage. They are designed to accept the ac differential signal from the magnetic head and produce a digital output pulse corresponding to each peak of the input signal. The gain stage amplifies the input waveform and applies it to an external filter network, enabling the active differentiator and time domain filter to produce the desired output.

The MC3470 and MC3470A are characterized for operation from 0°C to 70°C.

functional block diagram

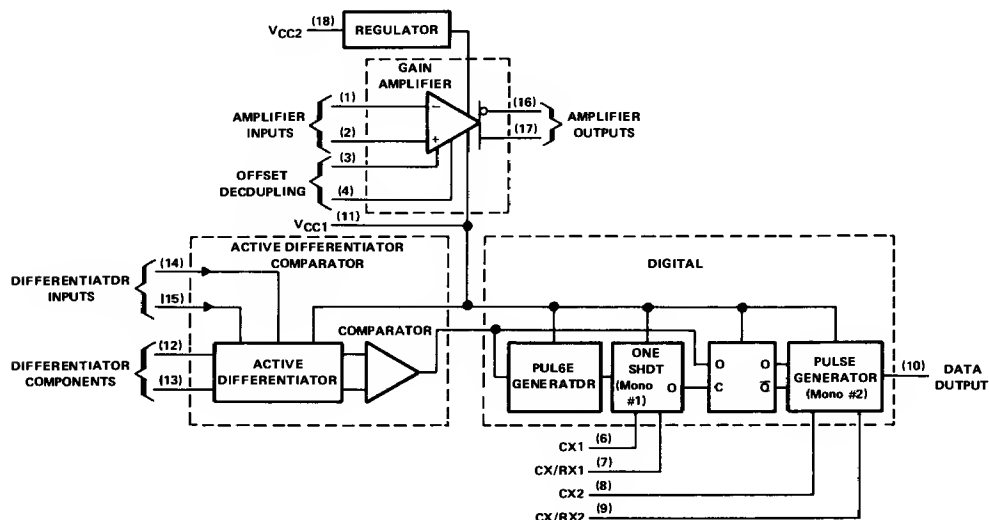

N DUAL-IN-LINE PACKAGE (TOP VIEW)

AMPLIFIER	1	18	VCC2
INPUTS	2	17	AMPLIFIER
OFFSET	3	16	OUTPUTS
DECOUPLING	4	15	DIFFERENTIATOR
GND	5	14	INPUTS
CX1	6	13	DIFFERENTIATOR
CX/RX1	7	12	COMPONENTS
CX2	8	11	VCC1
CX/RX2	9	10	DATA OUTPUT

4

Special Functions

MC3470, MC3470A FLOPPY DISK READ-AMPLIFIER SYSTEMS

absolute maximum ratings over operating temperature range (unless otherwise noted)

Supply voltage, V_{CC1} (see Note 1)	7 V
Supply voltage, V_{CC2}	16 V
Input voltage range (emplier inputs)	-0.2 V to 7 V
Output voltage, V_O (dete output)	-0.2 V to 7 V
Opereting free-air temperature range	0°C to 70°C
Storage temperature range	-65°C to 150°C

NOTE 1: All voltage values era with respect to network ground terminal.

recommended operating conditions

			MIN	NOM	MAX	UNIT
Supply voltage VCC1			4.75	5	5.25	V
Supply voltage VCC2			10	12	14	V
Timing capecitor CX1 (see Note 2)			150		680	pF
Timing cepacitor CX2			100		800	pF
Timing resistors RX1 end RX2			1.5		10	kΩ
Timing of digital saction	Monostable no. 1		500		4000	ns
	Monostable no. 2		150		1000	
Operating free-air temperature, TA			0		70	°C

NOTE 2: To minimize current transients, CX1 should be kept as small es convenient.

4

Special Functions

MC3470, MC3470A FLDPPY DISK READ-AMPLIFIER SYSTEMS

electrical characteristics over recommended ranges of supply voltages and operating free-air temperature (unless otherwise noted)

gain amplifier section

PARAMETER		TEST CONDITIONS	MIN	TYP [†]	MAX	UNIT
A _{VO}	Differential voltage amplification	V _{id} = 5 mV rms, f = 200 kHz	80	100	120	V/V
	MC3470A		100	110	130	
I _{IB}	Input bias current		-10	-25		μA
V _{ICR}	Common-mode input voltage range	THO ≤ 5%	-0.1 to 1.5			V
V _{IOR}	Differential input voltage range	THO ≤ 5%	± 25			mV
V _{OPP}	Peak-to-peak differential output voltage		3	4		V
V _{OC}	Common-mode output voltage	V _I = 0, V _{IO} = 0		3		V
V _{OO}	Differential output offset voltage	V _I = 0, V _{IO} = 0, T _A = 25°C			0.4	V
I _{OS}	Short-circuit output current (each amplifier output)	Output shorted to ground		-8		mA
		Output shorted to V _{CC1}	2.8	4		
r _i	Small-signal input resistance	T _A = 25°C	100	250		kΩ
r _o	Small-signal output resistance (single-ended)	V _{CC1} = 5 V, V _{CC2} = 12 V, T _A = 25°C		15		Ω
BW	Bandwidth (3 dB)	V _{id} = 2 mV rms, V _{CC1} = 5 V, V _{CC2} = 12 V, T _A = 25°C		5		MHz
CMRR	Common-mode rejection ratio	V _{CC1} = 5 V, V _{IPP} = 200 mV, A _{VD} = 40 dB, f = 100 kHz, T _A = 25°C		50		dB
k _{SVR}	Supply voltage rejection ratio	A _{VO} = 40 dB, T _A = 25°C, V _{CC1} = 5 ± 0.25 V, V _{CC2} = 12 V		50		dB
		V _{CC1} = 5 V, V _{CC2} = 12 ± 2 V		60		
V _n	Equivalent input noise voltage	BW = 10 Hz to 1 MHz, T _A = 25°C		15		μV

[†]All typical values are at V_{CC1} = 5 V, V_{CC2} = 12 V, T_A = 25°C.

4

Special Functions

MC3470, MC3470A FLOPPY DISK READ-AMPLIFIER SYSTEMS

active-differentiator section

PARAMETER		TEST CONDITIONS	MIN	TYP†	MAX	UNIT
I_{sink}	Sink current at pins 12 and 13	$V_{\text{OD}} = V_{\text{CC1}}$	1	1.4		mA
Peek shift	MC3470	$V_{\text{CC1}} = 5 \text{ V},$ $V_{\text{IDPP}} = 1 \text{ V},$ $I_{\text{cep}} = 500 \mu\text{A},$			5%	
	MC3470A	$V_{\text{CC2}} = 12 \text{ V},$ $f = 250 \text{ kHz},$ See Figure 1			2%	
r_{id}	Differential input resistance			30		k Ω
r_{od}	Differential output resistance			40		Ω

digital section

PARAMETER		TEST CONDITIONS	MIN	TYP†	MAX	UNIT
V_{OH}	High-level output voltage (pin 10)	$V_{\text{CC1}} = 4.75 \text{ V},$ $I_{\text{OH}} = -0.4 \text{ mA},$	2.7			V
V_{OL}	Low-level output voltage (pin 10)	$V_{\text{CC1}} = 4.75 \text{ V},$ $I_{\text{OL}} = 8 \text{ mA},$			0.5	V
I_{CC1}	Supply current from V_{CC1}	$V_{\text{CC1}} = 5.25 \text{ V}$		35	50	mA
I_{CC2}	Supply current from V_{CC2}	$V_{\text{CC2}} = 14 \text{ V}$		4.5	10	mA

timing characteristics over recommended ranges of supply voltages and operating free-air temperature (unless otherwise noted) (see Figure 2)



PARAMETER		TEST CONDITIONS	MIN	TYP†	MAX	UNIT
t_{r}	Rise time (pin 10)				20	ns
t_{f}	Fall time (pin 10)				25	ns
Timing accuracy of monostable no. 1 compared to $0.625 \text{ RX1} \cdot \text{CX1} + 200 \text{ ns}$		$\text{RX1} = 1.5 \text{ k}\Omega \text{ to } 10 \text{ k}\Omega,$ $\text{CX1} = 150 \text{ pF to } 680 \text{ pF}$	85%		115%	
Timing accuracy of monostable no. 2 compared to $0.625 \text{ RX2} \cdot \text{CX2}$		$\text{RX2} = 1.5 \text{ k}\Omega \text{ to } 10 \text{ k}\Omega,$ $\text{CX2} = 100 \text{ pF to } 800 \text{ pF}$	85%		115%	

†All typical values are at $V_{\text{CC1}} = 5 \text{ V}, V_{\text{CC2}} = 12 \text{ V}, T_{\text{A}} = 25^{\circ}\text{C}.$

4

Special Functions


PARAMETER MEASUREMENT INFORMATION

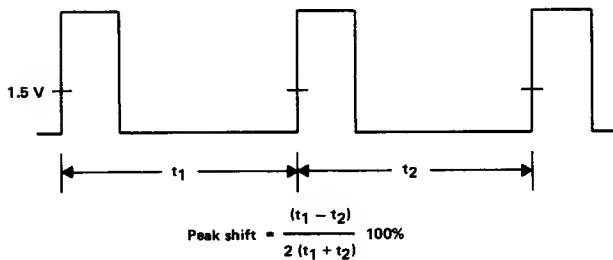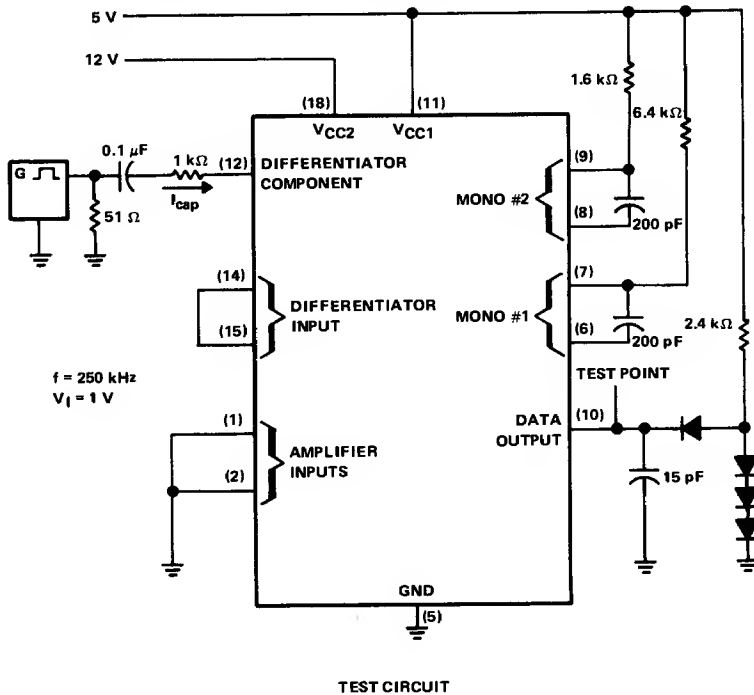


VOLTAGE WAVEFORMS

FIGURE 1. PEAK SHIFT

PARAMETER MEASUREMENT INFORMATION

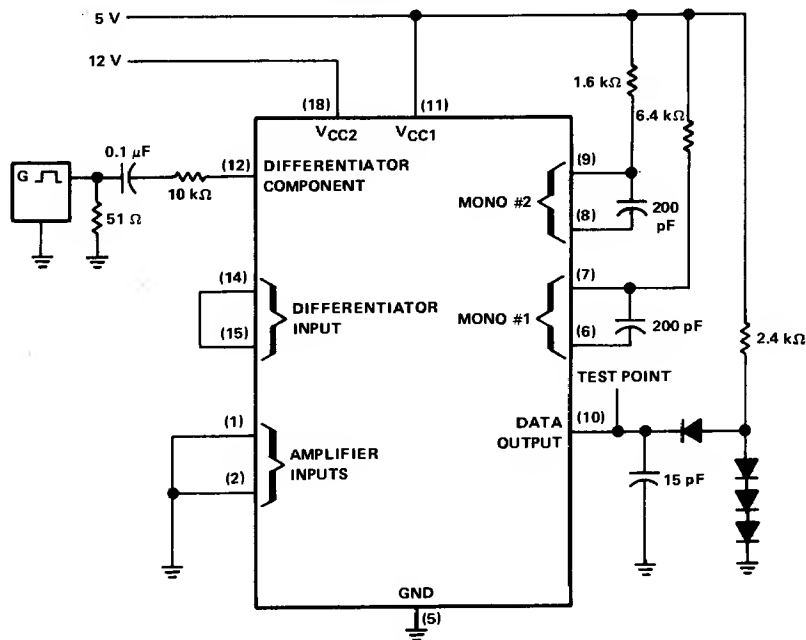

TEST CIRCUIT

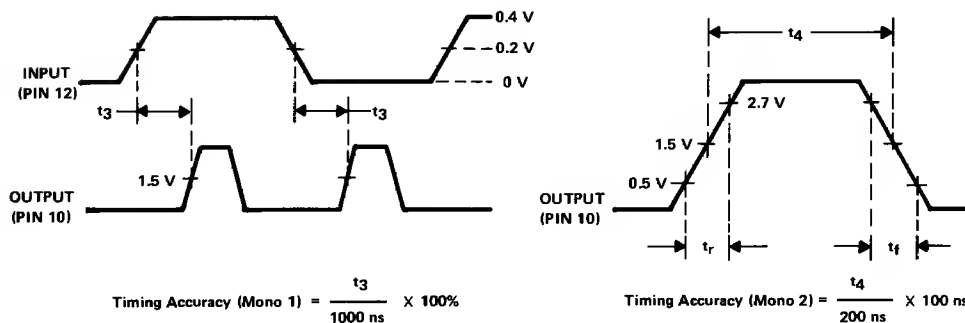

VOLTAGE WAVEFORMS

FIGURE 2. TIMING ACCURACY

4

Special Functions

TYPICAL CHARACTERISTICS

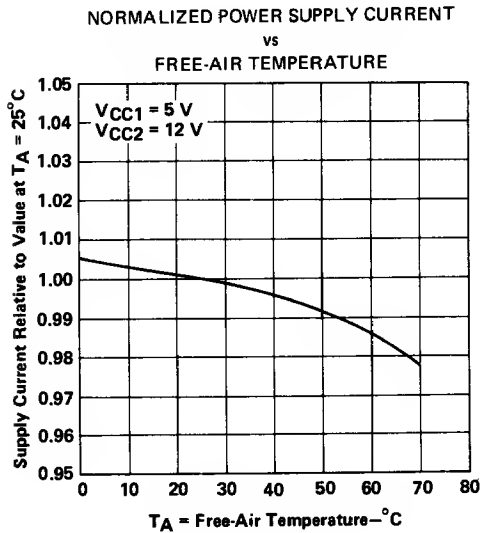


FIGURE 3

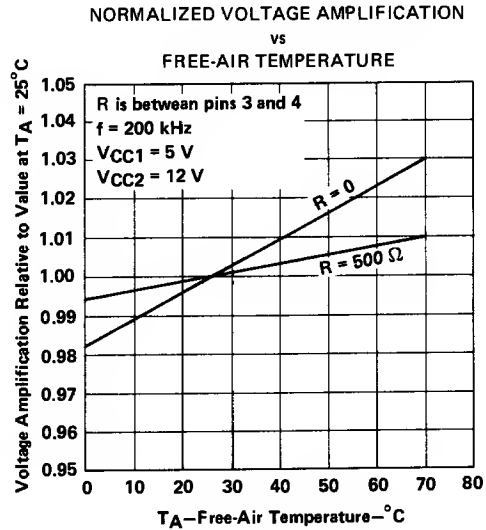


FIGURE 4

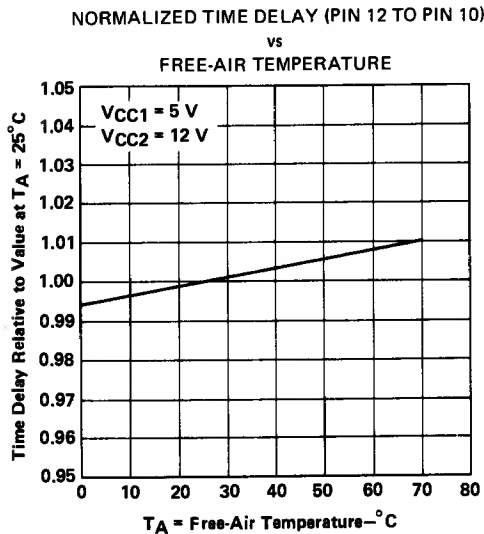


FIGURE 5

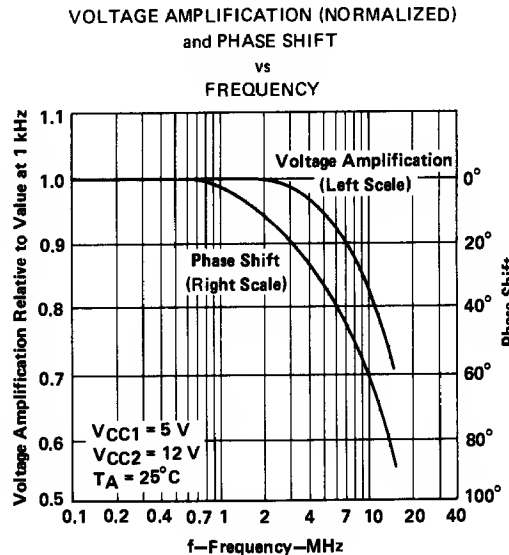


FIGURE 6

4

Special Functions

TYPICAL APPLICATION INFORMATION

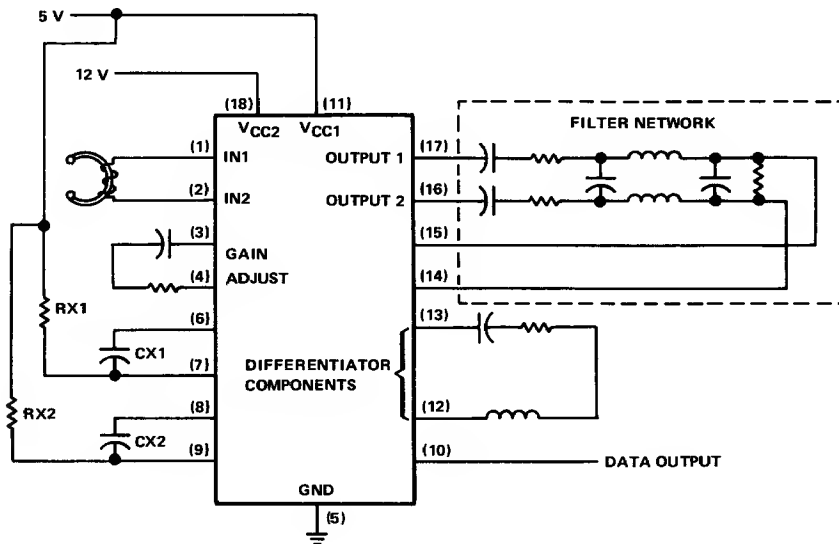


FIGURE 7

4

Special Functions